



Monocular Pulsar

3x20 B

Manual

Content

Description

Specifications

Package Contents

Monocular Installation

Legal Compliances and Disclaimers

Description

The **monocular Pulsar 3x20 B** converts Krypton and Proton devices into handheld thermal imaging monoculars with 3x magnification.

The monocular is installed on the thermal imaging module without the use of an additional adapter.

Specifications


3x20 B

Model	3x20 B
SKU	71014
Magnification, x	3
Lens diameter, mm/inch	20/0.79
Field-of-view, deg	15
Eye Relief, mm/inch	20/0.79
Eyepiece Focusing Range, Diopter	±5
Dimensions, mm/inch	95x45x51 / 3.74x1.77x2
Weight, kg/oz	0.1 / 3.53

Package Contents

- Monocular Pulsar 3x20 B
- Carrying Case
- Neck Strap
- Quick Start Guide
- Warranty Card
- Lens-Cleaning Cloth
- Allen Key

Monocular Installation

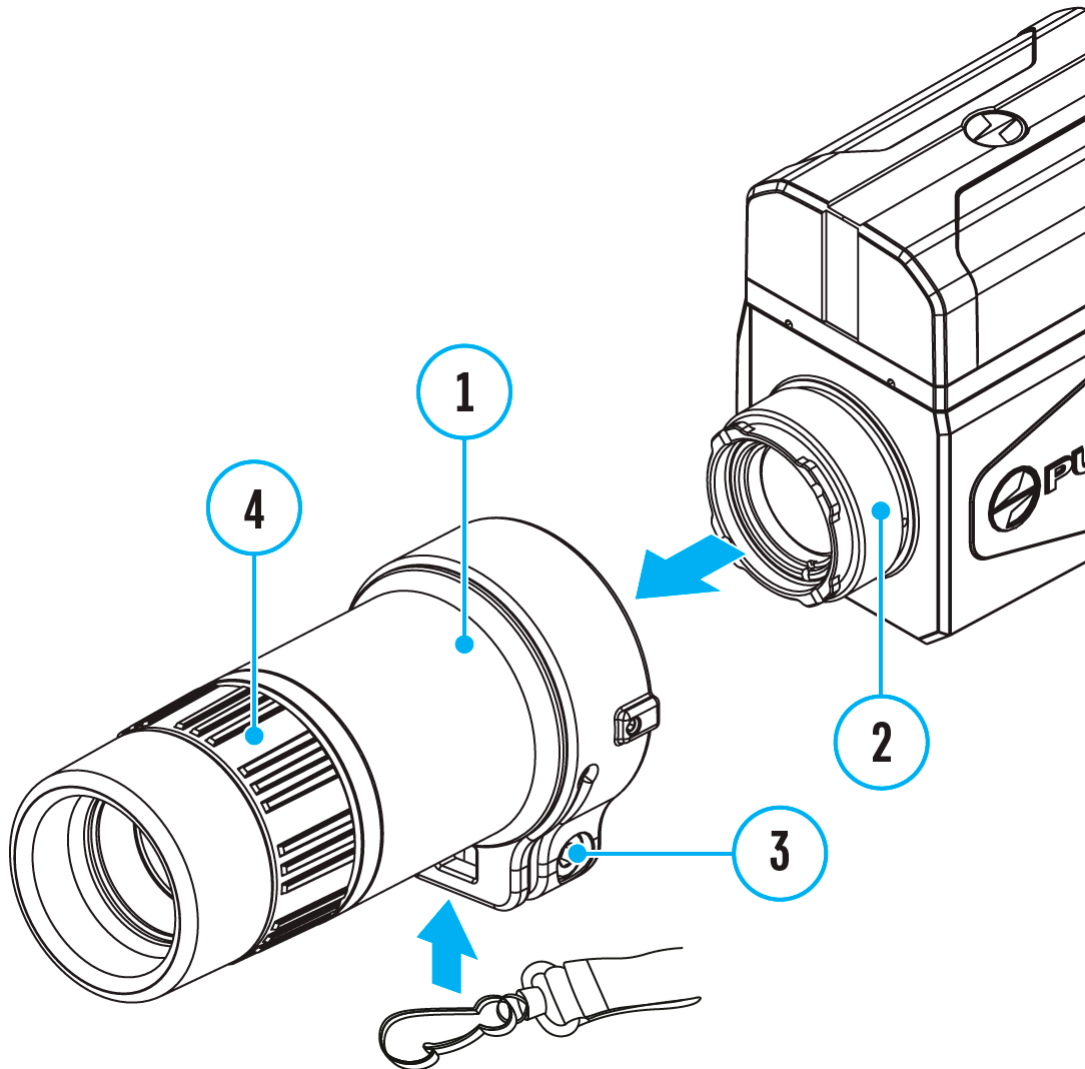

1. Align the protrusions on the monocular(**1**) on the side of its lens with the grooves of the mount (**2**) of the thermal imaging module.


2. Turn the monocular clockwise to secure it on the thermal imaging module. The recommended position of the clamping screw (**3**) is at the bottom (see Figure).

3. Turn on the thermal imaging module.

4. Adjust the eyepiece diopter ring **(4)** until the symbols in the display are sharp.

5. Loosen the screw **(3)** with an Allen key S3.

6. Align the display to the centre of the image in the monocular by tilting the thermal imaging module in the required directions.

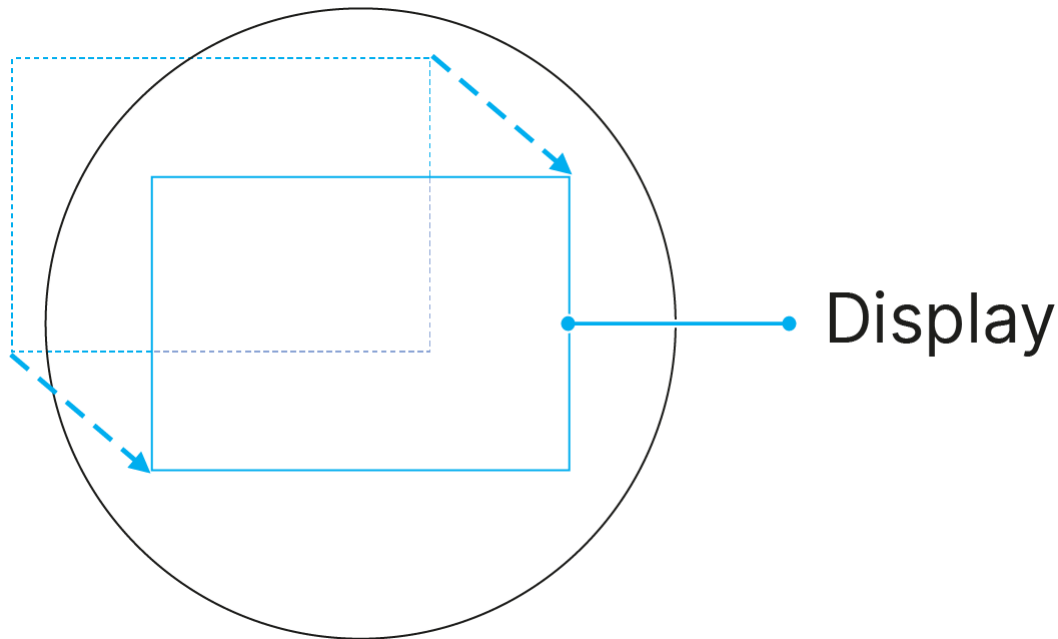

7. Lock the monocular in the chosen position by tightening the screw **(3)** until it stops (clamping force – 2.5 Nm/ 22.13 in-lbs).

8. To remove the monocular, turn it counterclockwise and disconnect from the thermal imaging module.

Legal Compliances and Disclaimers

The manufacturer reserves the right at any time, without mandatory prior notice to the Customer, to make changes to the package contents (subject to the applicable laws, if any), design and characteristics that do not impair the quality of the Product.

For technical support please contact support@pulsar-vision.com.

Answers to frequently asked questions about the devices can also be found in the **FAQ** section.